

T100 16 VATc coaxial cable Eca Euroclass, A Class shielded

RG-6 coaxial cable with copper inner conductor and aluminium braid (Cu/Al), and an excellent braid coverage (77%). A 16 VATc cable with double shielded and PVC sheath.

Ref.	2126
Logical ref.	T100
EAN13	8424450137550

Other features

Colour	White
Length	100.00 m

Packaging info

Reel	100 m
Box	500 m
Pallet	6000 m

Physical data

Net weight	43.00 g
Gross weight	43.00 g
Width	6.00 mm
Height	1,000.00 mm
Depth	6.00 mm
Main product weight	40.00 g

Highlights

- Copper inner conductor and aluminium braid
- Class A shielded

- Eca Euroclass

Discover

Double-shielded Class A coaxial cable

With 2 shielding layers, these cables provide an outstanding shielding thanks to a high-coverage braid.

They belong in EN 50117 standard Class A, according to their structural properties:

- For 5 MHz - 30 MHz => $TI < 5 \text{ m}\Omega/\text{m}$
- For 30 MHz - 1000 MHz => $SA > 85 \text{ dB}$
- For 1000 MHz - 2000 MHz => $SA > 75 \text{ dB}$
- For 2000 MHz - 3000 MHz => $SA > 65 \text{ dB}$

Where the transfer impedance (TI) defines how effective the shielding is at low frequencies, while the shielding attenuation (SA) defines it in the 30 MHz-to-3000 MHz range.

Mounting details

DETAIL VIEW OF THE COAXIAL CABLE SECTION


A-Inner conductor

B-Dielectric

C-Foil

D-Braid

E-Outer sheath

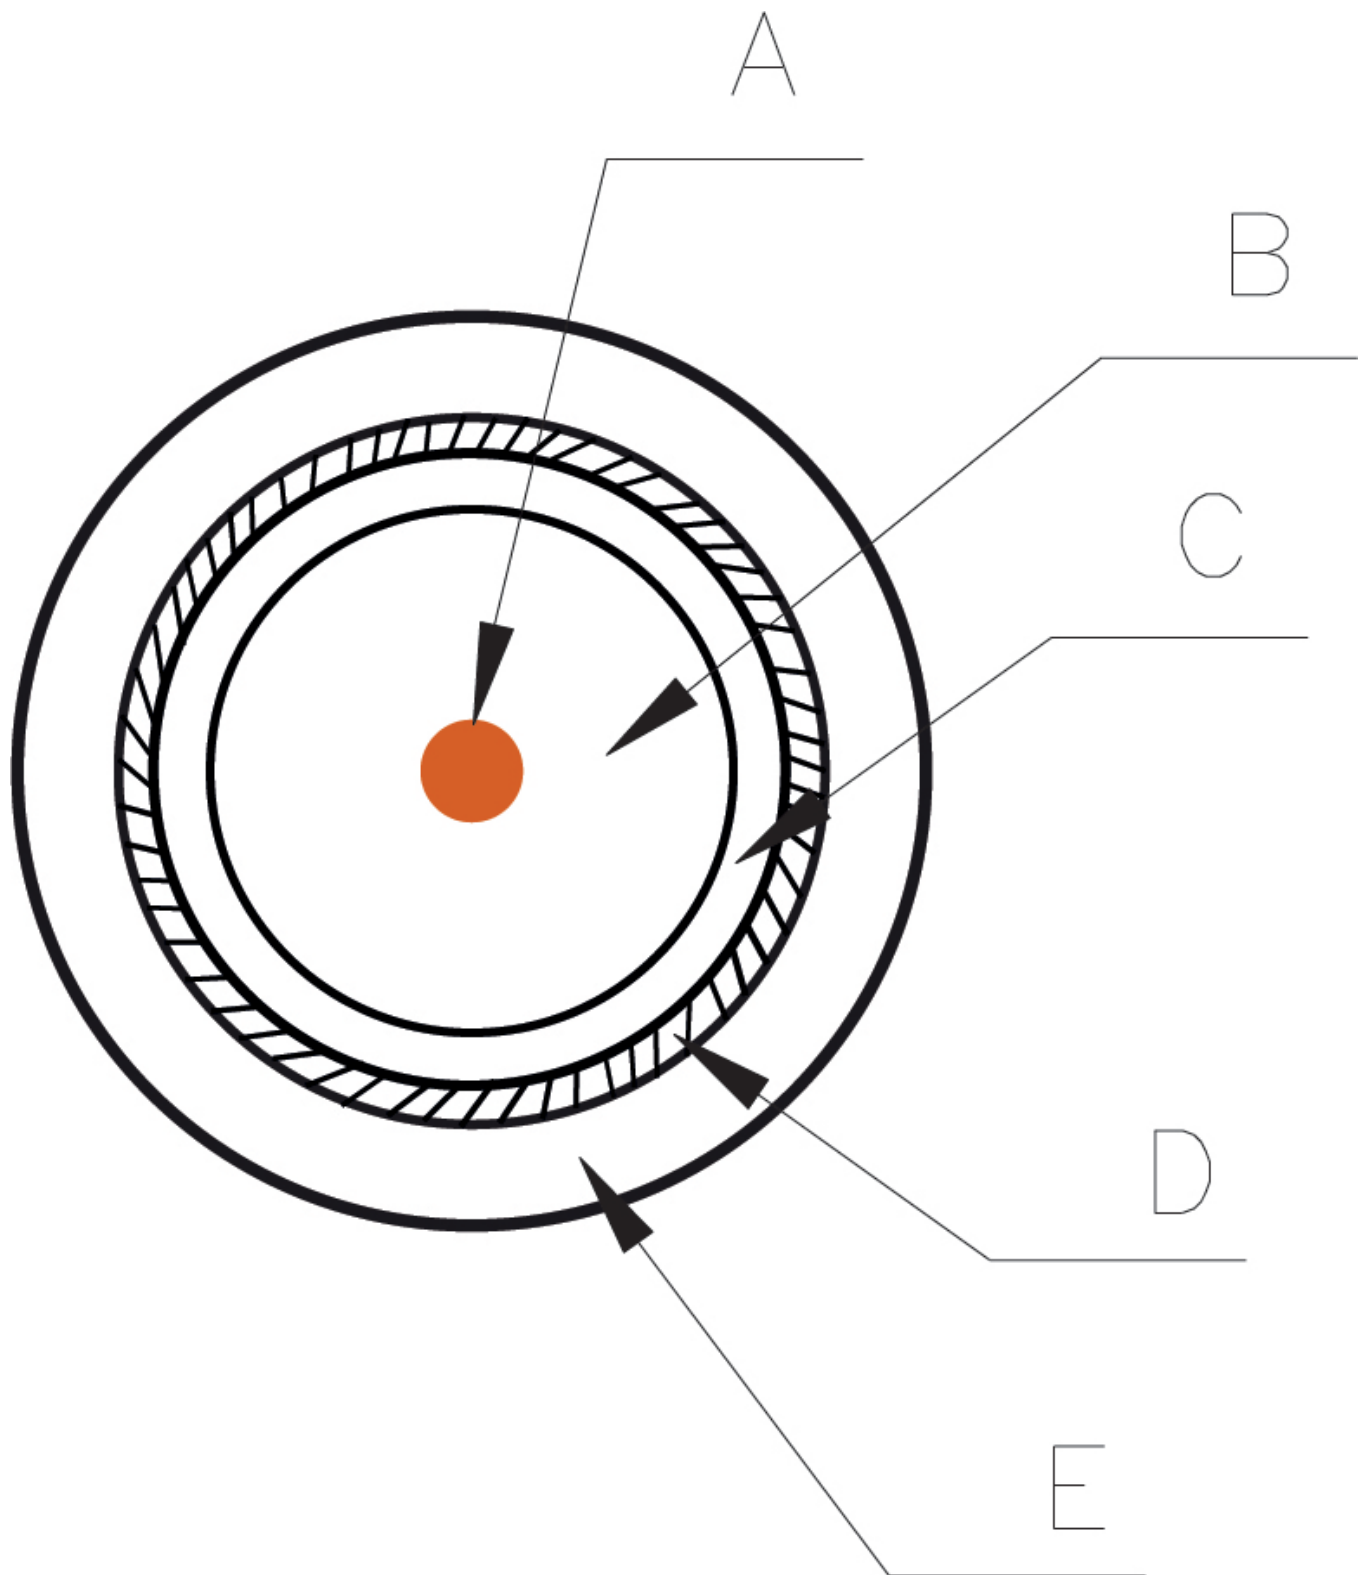

Technical specifications : Ref. 2126

Model		T-100																			
Cable type		RG-6																			
Standard		EN 50117-9-2																			
Euroclass		Eca																			
Class		A																			
Inner conductor Diameter	mm	1.13																			
Inner conductor Material		Copper (Cu)																			
Inner conductor Resistance	Ω/km	< 20																			
Dielectric Diameter	mm	4.7																			
Dielectric Material		Foam polyethylene (PEE)																			
Dielectric Color		White RAL 9003																			
Overlapped foil		Aluminium + Polyester + Aluminium																			
Braid Material		Aluminium																			
Braid dimensions: No. of carriers (Nc)		16																			
Braid Dimensions: No. of strands per carrier (Ns)		8																			
Braid Dimensions: strand diameter (Ø)	mm	0.12																			
Braid Resistance	Ω/km	< 27																			
Braid Coverage	%	77																			
2nd foil		No																			
2nd foil glued to the dielectric		No																			
Petrol-jelly		No																			
Anti-migrating film		No																			
Outer sheath Diameter	mm	6.6																			
Outer sheath Material		PVC																			
Minimum bending radius	mm	33																			
Transfer impedance (5-30MHz)	mΩ/m	< 5																			
1GHz shielding	dB	> 85																			
Spark Test	Vac	3000																			
Capacitance	pF/m	52																			
Impedance	Ω	75																			
Velocity ratio	%	85																			
Operating temperature	°C	-30 ... 70																			
Frequencies		5 MHz	47 MHz	54 MHz	90 MHz	200 MHz	500 MHz	698 MHz	800 MHz	862 MHz	950 MHz	1000 MHz	1220 MHz	1350 MHz	1750 MHz	2050 MHz	2150 MHz	2200 MHz	2300 MHz	2400 MHz	3000 MHz
Attenuation (typ.)	dB/m	0.02	0.05	0.05	0.06	0.08	0.14	0.15	0.16	0.17	0.18	0.19	0.21	0.23	0.25	0.28	0.29	0.29	0.3	0.31	0.34
Return losses (min.)	dB	23	23	23	23	23	20	20	20	20	20	20	18	18	18	16	16	16	16	16	16