
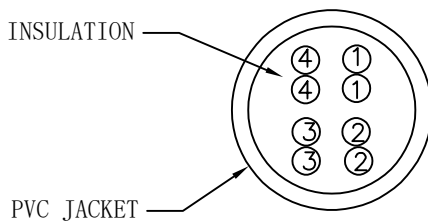




REVISION	DATE	REV.
NEW	2022/10/26	A/0

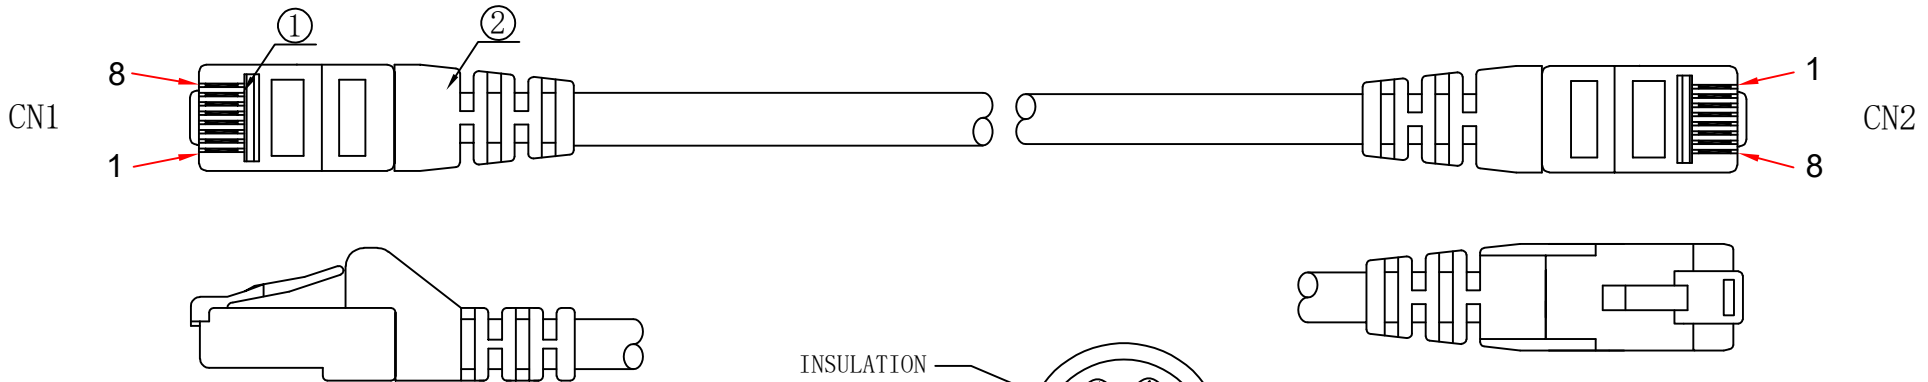



L:

L1=0.25M
L2=0.5M
L3=1M
L4=2M
L5=3M
L6=5M
L7=7.5M
L8=10M
L9=15M
L10=20M
L11=30M
L12=50M

ELECIRCAL CHARACTER

- 100% OPEN&SHORT TESTING
- WITHSTANDING VOLTAGE: DC 300V 10MS
- INSULATION RESISTANCE: 5M OHMS(MIN)
- CONDUCTIVE RESISTANCE: 5 OHMS(MQX)
- ALL MATERIAL MUST MEET ROHS REQUIRENTS

MATERIAL LIST:

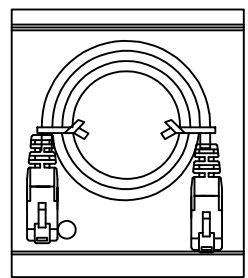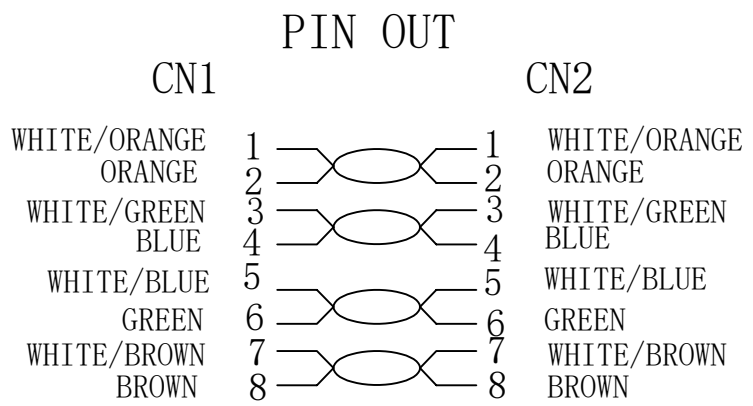


PACKING DRAW

③	OUTER MOLD	75A PVC COLOR SAME AS THE JACKET OF THE CABLE	11	g	DRAWING	B-UTP5*****	PART NAME	PATCH CABLE UTP CAT 5		
②	PLUG	RG45 8P8CS, Six Ascending Two Down, CAT5 PIN Plated Gold FU"	2	PCS	CUSTOMER		ICON	TOLERANCE X. ± 0.5 .X ± 0.3 .XX ± 0.1		
①	CABLE	UTP CAT 5E 26AWG 7/0.16CCA 4*2P OD4.3±0.2mm PVC Printing:UTP CAT5E 26AWG PATCH CORD ISO 11801 EIA/TIA 568B	L	M	CUSTOMER'S ITEM					
					APPRO BY	CHECK BY	DRAWN BY	SCALE	MM	
NO.	PARTS. NAME	SPECIFICATION STANDARD	QT' Y	REMARK	Emil Olsen	wjc	Jason	PAGE	1/1	


SPECIFICATIONS

TITLE: Cat.5e 7/0.16CCA*4P UTP

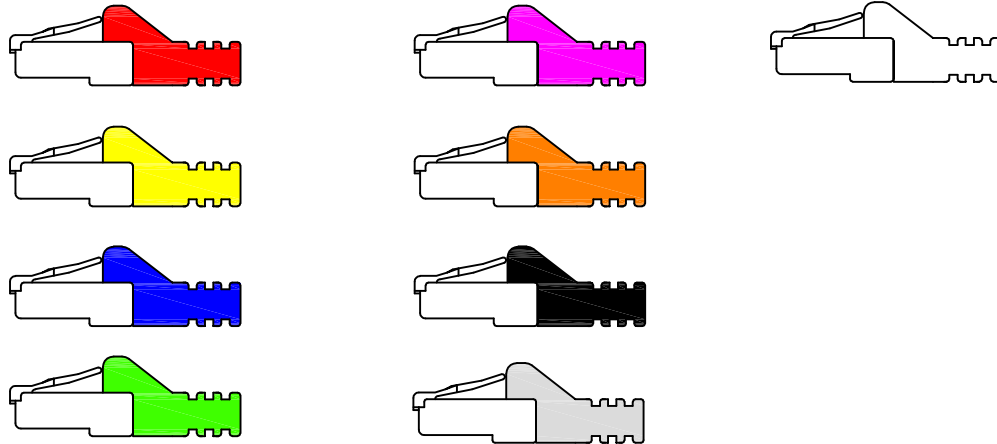

FILE AMEND NOTE	DATE	EDITION
ORIGINALITY EDITION	2022/10/26	A/0

VIEW:

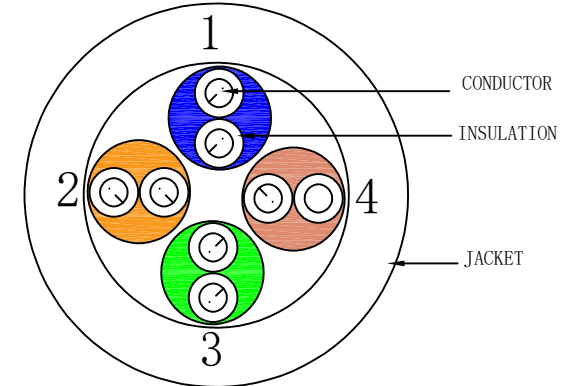

NOTE:

- 1. WHITE (BLUE) /BLUE 2. WHITE (ORANGE) /ORANGE
- 3. WHITE (GREEN) /GREEN 4. WHITE (BROWN) /BROWN

MARKING: UTP CAT5E 26AWG PATCH CORD ISO 11801 EIA/TIA 568B

NOTE:

- 1. Impedance (ohms) 100 ± 15 OHMS
- 2. Max. Bandbreite / Max. bandwidth: 100 MHz



ITEMS		UNIT	A (4P)			
CONDUCTOR	SIZE	AWG	26AWG			
	CONSTRUCTION	PCS/mm	7/0.16 ± 0.006mm			
	MATERIAL	/	CCA			
INSULATION	MATERIAL	/	HD-PE			
	DIA.	mm	0.86 ± 0.02mm	0.78 ± 0.02mm	0.86 ± 0.02mm	0.78 ± 0.02mm
	COLOR	/	WHITE (BLUE) /BLUE	WHITE (ORANGE) /ORANGE	WHITE (GREEN) /GREEN	WHITE (BROWN) /BROWN
	CONCENTRIC	%	≥90%	≥90%	≥90%	≥90%
TWIST	AL-FOIL	mm u	/			
	MYLAR	mm u	/			
TWIST	CONSTRUCTION	/	4p			
	MYLAR	mm u	/			
	DRAIN WIRE	mm	/			
	AL-FOIL	mm u	/			
	FILLERS	/	/			
BRAID	CONSTRUCTION	/	/			
	PICKS	/	/			
JACKET	MATERIAL/COLOR	/	PVC			
	OUTER DIA.	mm	4.3 ± 0.2mm			
	CONCENTRIC	%	≥80%			

CHART NO.		NAME	Cat.5e 7/0.16CCA*4P UTP		
CUSTOMER NAME	B-UTP5****		PICTURE SHOWS	TOLERANCE	
PO.				X. ±1.00	X.X ±0.50
APPROVED		AUDIT	DRAWING	UNITS	MM
Emil Olsen		He Junlin	Chen Wenhui	PAGE	1/1