

CONECTOR DE COMPRESIÓN F (T-200) "F" COMPRESSION CONNECTOR

Ref.410801

Art.Nr.FPST200



INTRODUCCIÓN

Fabricado de latón niquelado (lo que le otorga una alta calidad de acabado y muy bajas pérdidas) se destina para su uso en redes coaxiales de media o pequeña dimensión, de forma conjunta con cables coaxiales tipo T-200plus.

Se caracteriza por poseer una conexión firme y robusta gracias a su cierre por compresión, lo que repercute en su facilidad para el roscado o desenroscado repetitivo sobre los diferentes dispositivos.


Para su conectorización se precisa de la herramienta de compresión Ref. 2163/216301, a las cuales se puede sumar la herramienta de inserción Ref. 216310.

INTRODUCTION

Made out of nickel-plated brass (which provides a high quality Finish and very low losses) it is intended for being used in coaxial networks of medium or small size, together with T-200plus type coaxial cables. It is characterized by having a firm and robust connection thanks to its compression closure, which has an impact on their ease for repeated threading or unscrewing on different devices.

For its assembly, the compression tool Ref. 2163/216301 is required, to which the insertion tool 216310 can be added.

MONTAJE / ASSEMBLY

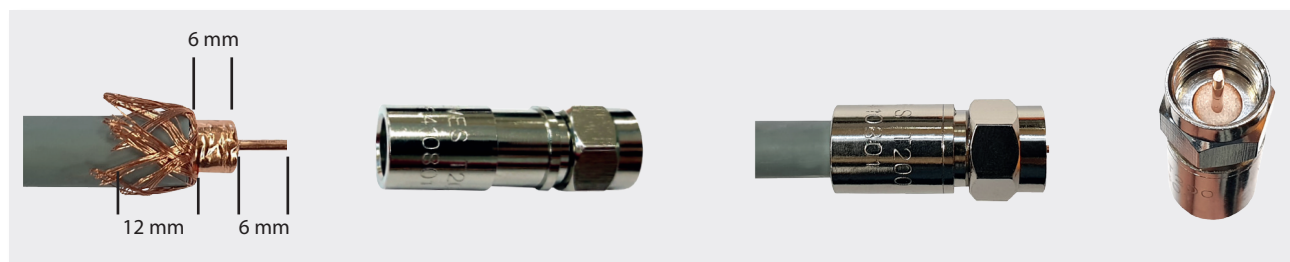

CARACTERÍSTICAS / CHARACTERISTICS

Especificaciones técnicas	Technical specifications			410801 FPST200
Rango de frecuencias	Frequency range		MHz	0.3 - 3000
Impedancia nominal	Nominal impedance		Ω	75
Pérdidas de inserción	Insertion loss	0.3 - 1000 MHz	dB	- 0.08
		1000 - 2150 MHz		- 0.12
		2150 - 3000 MHz		- 0.16
Compatibilidad coaxial	Coaxial compatibility			T-200plus
Llave para montaje	Key for assembly		mm	11
Dimensiones conector	Connector dimensions		mm (L / Ø)	32.12 / 12.5 (factory) 25.50 / 12.5 (in use)
Peso	Weight		g	8 ± 5%

SUMINISTRO / SUPPLY

Forma de suministro	Caja plástica profesional
Supply form	100-unit professional plastic box



410801_000_ES-EN

Fabricante / Manufacturer : Televes S.A.U. Rúa B. de Conxo, 17 - 15706 Santiago de Compostela, A Coruña Spain www.televes.com